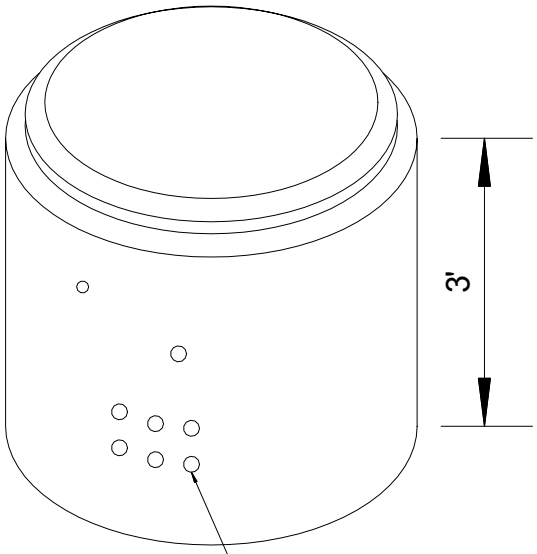

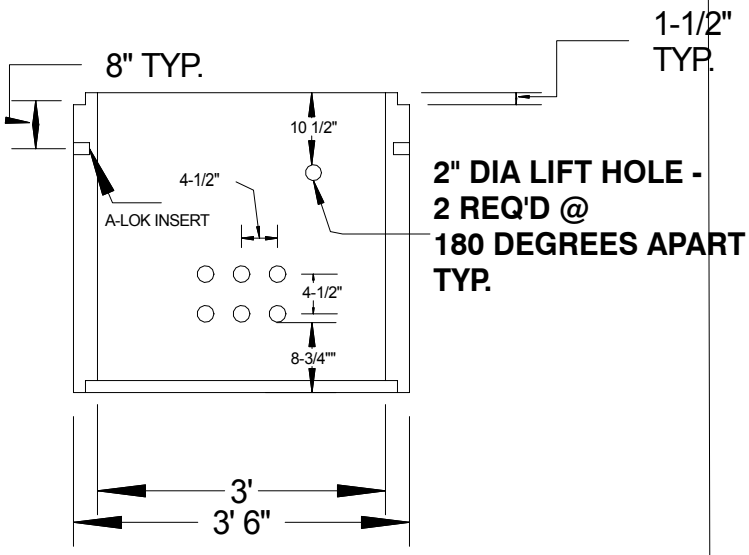

SECTION

2-1/2" X 2" TAPERED HOLES
(1 GROUP OF 6 HOLES EACH SIDE)

PERFORATED WELL TILE

CONCRETE - 5000 PSI @ 28 DAYS
STEEL REINF. - 6 X 6 X 10 GA. WIRE MESH
CONSTRUCTION JOINT -
SELF-SEALING W/TONGUE & GROOVE CONSTRUCTION

WALL THICKNESS 3 1/2"

MODEL WTP - 3' TALL

CBS
Concrete Building Supply
Quality Block, Masonry and Precast Products Since 1938
www.concretebuildingsupply.com
PHONE: 563-0700
FAX: 563-1392

APPROX. WEIGHT
1066 LBS

SCALE-	N/A
DRAWN BY-	R. E. S.